


25DM

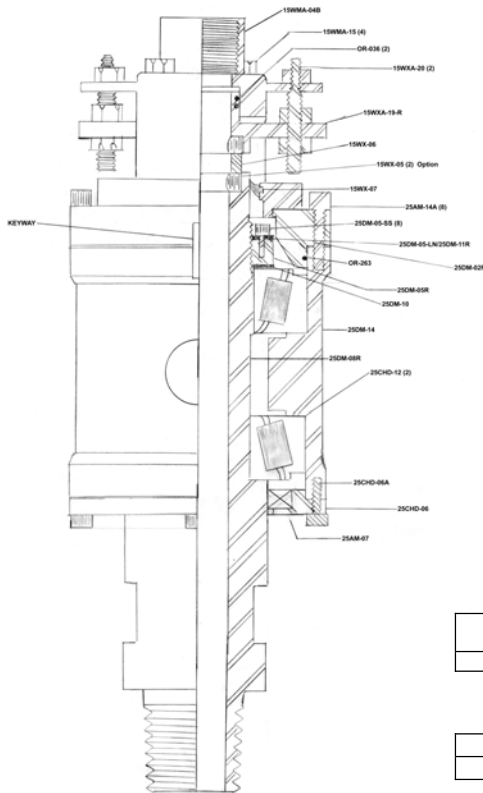

- Fluid Passage – 2 ½"
- For Pulldown Rig
- Grease Lubricated Bearings
- Adjustable Packing
- Packing can be changed without disassemble
- Adjustable tapered roller bearing

TECHNICAL

LENGTH	WIDTH	WEIGHT	HOSE CONN.	LOWER CONN.	FLUID PASSAGE	WORKING PRESSURE
	9 1/8"		3"	3 ½" IF	2 ½"	To 300 PSI

WEIGHT CAPACITY

STATIC	ROTATING
60,000 LBS	28,000 LBS @ 100 RPM

PARTS LIST

PART NO.	DESCRIPTION	QTY. REQ.	PRICE
25DM-8050-XX	SWIVEL, ADJUSTING NUT WITH LOCK NUT, 2 ½" NPT FEMALE HOSE CONNECTION, ADJUSTABLE PACKING. 2" OD PINS ON 9 1/8" SHOULDERS, WITH 3 ½" IF LH PIN LOWER CONNECTION		6093.96
15WMA-04B	GOOSENECK, ADJUSTABLE (2 ½" NPT FEMALE)	1	988.14
15WMA-15	STUD WITH NUT	4	11.98 ea
15WX-05	PACKING	2	13.88 ea
15WX-05-90	PACKING, 90 DURO	Option	13.88 ea
15WX-06	WEARBUSHING	1	46.90
15WX-07	HOUSING SEAL	1	23.01
OR-036	O RING, ADJUSTING GLAND	2	4.00 ea
15WXA-19-R	ADJUSTING GLAND	1	454.26
15WXA-20	ADJUSTING SCREW WITH NUTS	2	29.12 ea
25CHD-06	LOWER SEAL BOX	1	396.37
25AM-07	HOUSING SEAL	1	43.48
25CHD-12	BEARINGS (CUP AND CONE)	2	CONSULT ea
25DM-02R	PLATE, COVER	1	1049.96
25DM-05-LN	BEARING LOCKNUT	1	305.47
25DM-05R	ADJUSTING NUT	1	334.38
25DM-08R	SPINDLE, 3 ½" IF LH PIN	1	1755.97
25DM-10	BEARING SHIELD	1	212.17
25DM-11R	PLATE, LOCK	1	298.12
25DM-14	BEARING HOUSING WITH PINS, 2" OD, 9 1/8" SHOULDERS	1	1936.70
OR-263	O RING COVER PLATE	1	4.00

Other sizes of connections available, please consult factory.

Option for above swivel, may affect pricing of complete swivel. Other options available, please consult factory.

