


# 3FS “SPECIAL” FLOATING SUB

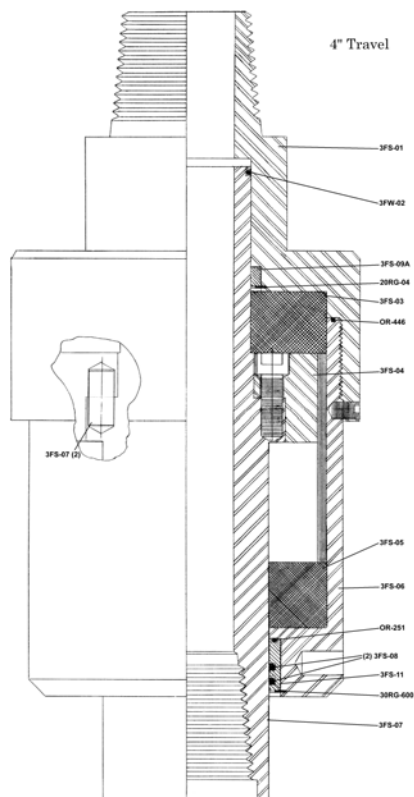

- 4" of travel
- Fluid Passage – 2 ½" Maximum
- Grease Lubricated
- Torques to 12,000 ft lbs
- Hoisting loads to 100,000 lbs
- Can be repaired in the field

### TECHNICAL DATA

OPEN LENGTH	CLOSED	OD	FLUID PASSAGE
29	25	11" Max	2 ½

### PARTS LIST ONLY

PART NUMBER	NAME	WT/LBS	NUMBER REQ.	PRICE
<b>3FS-1500-XX</b>	FLOATING SUB, 4" FULL HOLE RH PIN UPPER CONNECTION WITH 3 ½" IF RH BOX LOWER CONNECTION			CONSULT
20RG-04	PACKING RETAINER		1	<b>C O N S U L T</b>
30RG-600	PACKING RETAINER		1	
3FS-01	HOUSING, ADAPTER, 4" FH RH PIN		1	
3FS-02	UPPER SEAL		1	
3FS-03	UPPER CUSHION		1	
3FS-04	SLIDE DRIVE		1	
3FS-05	LOWER CUSHION		1	
3FS-06	HOUSING DRIVE		1	
3FS-07	SPINDLE 3 ½" IF RH BOX		1	
3FS-08	LOWER SEAL		2	
3FS-09	TORQUE PINS		4	
3FS-09A	UPPER WEAR SLEEVE		1	
3FS-11	LOWER WEAR SLEEVE		1	
OR-251	O RING (LOWER SLEEVE)		1	
OR-446	O RING (UPPER HOUSING)		1	

Other sizes of connections available, please consult factory.

Option for above swivel, may affect pricing of complete swivel. Other options available, please consult factory.

4" Travel

