


4.0 DJ ROTATING HEAD

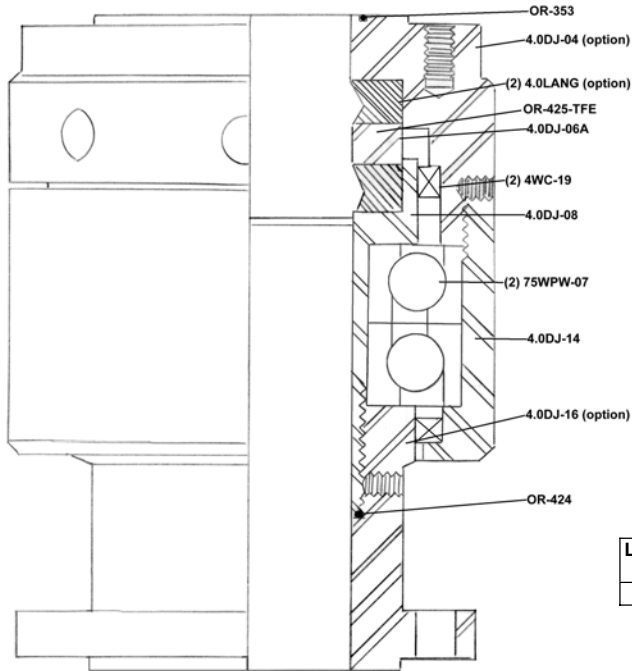

- Fluid Passage – 4” Maximum
- Compact Design
- Thrust Ball Bearings for pressure and radial load support
- Choice of hose and lower connection threads
- Easy field maintenance and repair

TECHNICAL DATA

LENGTH	WIDTH	WEIGHT	HOSE CONN.	LOWER CONN.	FLUID PASSAGE	WORKING PRESSURE
13	9	145	150# Flange	150# Flange	4”	TO 300 PSI

WEIGHT CAPACITY
DESIGNED FOR PRESSURE LOAD ONLY

PARTS LIST

PART NUMBER	DESCRIPTION	WT/LBS	QTY. REQ.	PRICE
4.0DJ-2800-XX	WESTERN ROTATING HEAD, 4”, 150# FLANGE HOSE CONNECTION WITH 4”, 150# FLANGE LOWER CONNECTION 4” ID, TO 300 PSI W.P.			5442.21
4.0DJ-04	GOOSENECK, 150# FLANGE HOSE CONNECTION		OPTION	1465.20
4.0 LANG	PACKING		2	20.09 ea
4.0 LANG-90	PACKING, 90 DURO		OPTION	20.09 ea
4.0 DJ-06A	WEARBUSHING WITH O-RINGS		1	216.38
4WC-19	HOUSING SEAL		2	70.82 ea
75WPW-07	BEARINGS		2	774.71 ea
4.0DJ-8	SPINDLE, BEARING		1	1360.52
4.0DJ-14	HOUSING, BEARING		1	1524.49
4.0DJ-16IK	CONNECTION, LOWER (4” 150# FLANGE)		OPTION	1539.33
OR-353	O-RING (GOOSENECK)		1	4.00
OR-424	O-RING (THREAD SEAL)		1	4.00
OR-425-TFE	O-RING (WEARBUSHING)		2	9.35 ea

Other sizes of connections available, please consult factory.

Option for above swivel, may affect pricing of complete swivel. Other options available, please consult factory.

