


SPECIAL INLETS “SPECIAL SWIVEL” 6RG

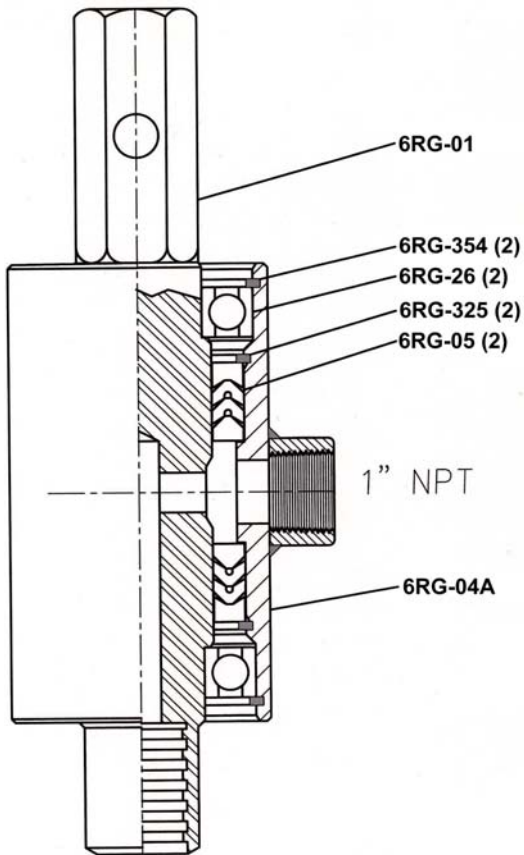

- Manufactured from high grade alloy steel
- Working Pressures to 350 PSI
- Radial Ball Bearings for smooth rotation
- Non adjustable chevron (V-ring) packing
- Grease Lubricated
- Can be used for both mud and air drilling
- Can be repaired if necessary in the field
- 6RG-S-4005-XX has a working pressure to 750 PSI

TECHNICAL DATA

MODEL#	OVERALL LENGTH	WIDTH	WEIGHT LBS.	UPPER	HOSE CONN.	LOWER CONN.	WATERCOURSE CONN.
6RG	13-1/2"	4"	22.0	1-5/8" HEX	1"	AW BOX	5/8"

PARTS LIST

PART NO.	DESCRIPTION	WT/LB EACH	QTY. REQ.	PRICE
6RG-4005-XX	WESTERN SIDE INLET SWIVEL, 1 5/8" MALE HEX TOP CONN., 1" NPT FEMALE HOSE CONNECTION WITH AW ROD RH BOX LOWER CONNECTION			580.26
6RG-S-4005-XX	WESTERN SIDE INLET SWIVEL WITH STEEL ADAPTER 1 5/8" MALE HEX TOP CONN., 1" NPT FEMALE HOSE CONNECTION WITH AW ROD RH BOX LOWER CONNECTION			658.61
	ADD FOR "SPECIAL STEM"			275.00
6RG-01	STEM, 1 5/8" HEX BY AW RH BOX	9.50	1	267.77
6RG-04A	PACK OFF HOUSING 1" NPT H/C	8.50	1	286.83
6RG-05	PACKING SET WITH MALE ADAPTER	.50	2	28.98 set
6RG-05-FA-S	PACKING SEAT RING, <i>STEEL</i>	.25	Option	42.81 ea
6RG-26	BEARINGS	2.30	2	36.09 ea
6RG-325	RETAINER, PACKING	.10	2	6.10 ea
6RG-354	RETAINER, BEARING	.10	2	7.69 ea

Other sizes of connections available, please consult factory.

Option for above swivel, may affect pricing of complete swivel. Other options available, please consult factory

